

«I can't see a single bubble.»  
Blasogrind GTC 7



Alexei Sevostianov  
Project Manager Grinding Technology  
J. Schneeberger Maschinen AG  
Switzerland

# Fast air release for optimal cooling. Blasogrind GTC 7

## Peak performance grinding oil


- Performance-optimized formulation for high feed rate, long dressing intervals and excellent surface quality.
- Active cobalt inhibition preventing leaching in carbide grinding.
- Colorless and transparent for a clear view of the grinding process.
- Odorless for a pleasant working environment.

## Especially suited for tool grinding and re-grinding


- For carbide, ceramic and cermet.
- Also suited for profile and creep feed grinding.

## Fast air release

- Ensures optimal cooling.
- Prevents microcracks in tools.
- Allows for a smaller coolant tank.

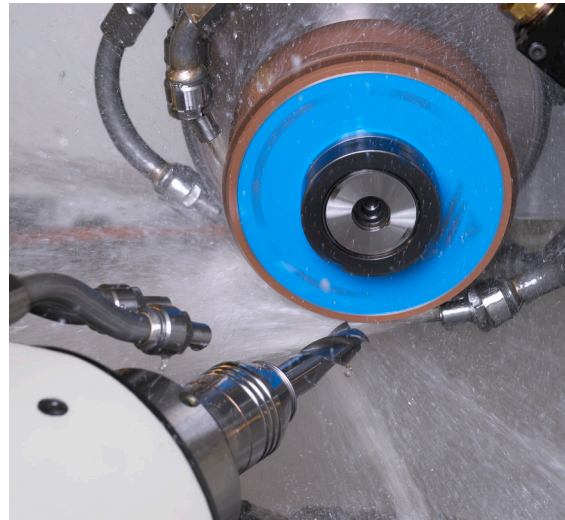


### Blasogrind GTC 7

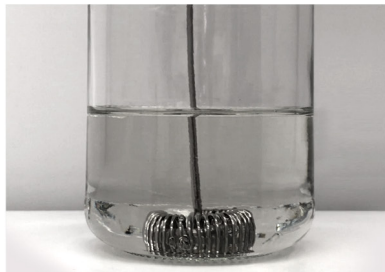


Customary grinding oil

### Little foam

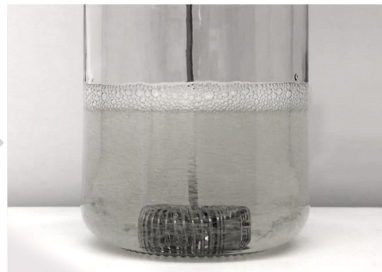

Shaken for 10 sec.

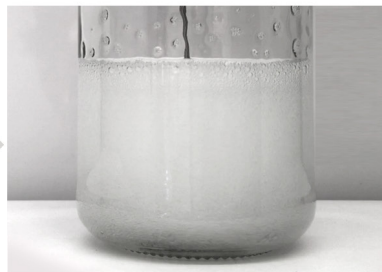


Lots of foam

### No entrained air



Let stand for 10 sec.

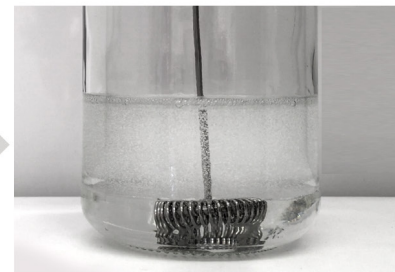

Lots of entrained air

## Product data

Product data		Measuring method
Viscosity at 40°C	7.0 mm <sup>2</sup> /s	ISO 3104
Flash point	160°C	ISO 2592 (COC)
Copper corrosivity	1a (3h at 60°C)	ISO 2160
Color	Colorless	ASTM 0.5

Note: Suitable for edgcap and pre-coat filters.



[blaser.com](http://blaser.com)